


DESCRIPTION

The **Flatback Kraft Paper Tape** is made from high strength kraft paper and coated one side with an aggressive synthetic Rubber adhesive system. The flatback means it will adhere to its own backing, excellent for secure carton closure and picture framing.



FEATURES

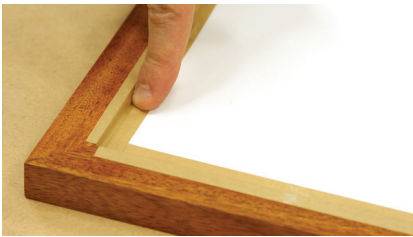

FLATBACK KRAFT PAPER

Made from high strength kraft paper with flatback feature. Means it will adhere to its own backing, excellent for secure carton closure and picture framing. Very good consistent & smooth unwinding off the roll performance.



SYNTHETIC RUBBER ADHESIVE

An aggressive dependable long life Synthetic Rubber Adhesive system that will bond instantly to various surfaces. Specifically designed to offer a strong and secure seal on a variety of substrates. This product is not repulpable.



LONG LIFE SECURE SEAL

Provides a quick, positive long life seal in packaging & framing applications.



MOISTURE RESISTANT

High tensile strength with good moisture resistance.

CERTIFICATES



PRODUCT & ENVIRONMENTAL SAFETY:

- **REACH:** Complies with EC No 1907/2006
- **ROHS:** Complies with 2002/95/EU, 2011/65/EU, 2015/863/EU Directives.
- Meets California Prop 65 & Toxics in Packaging requirements (means this product meets the necessary non toxic requirements in the State of California).

TYPICAL APPLICATIONS

- Excellent for strong & secure carton closure applications.
- Great performance when used as a Picture Framing frame sealing & securing paper tape. Excellent feature of adhering to its own backing, meaning it can be over lapped.
- Used as a reliable paper tabbing & splicing Paper Tape The ability to adhere to difficult carton & laminated board grades (testing recommended to ensure suitability).

TECHNICAL INFORMATION

Backing	Kraft Paper - Flatback
Adhesive	Synthetic Adhesive
Colour	Brown
Total Thickness	0.14mm
Adhesion to Steel	23.3N / 25mm PSTC-101
Tensile Strength	148.9N / 25mm PSTC-133
Roll Length	50m
Standard Roll Width	24, 36, 48 & 72mm <i>(Can be slit to any width size from 1500mm log roll)</i>

SIMILAR PRODUCTS

- **FPP1** - Premium Flatback Paper Tape
- **0327ECO** - Kraft Paper Tape

SURFACE SUBSTRATE CONDITION & PREPARATION

The surfaces to be bonded must be dry & free from any contamination including dust, oils, & fats, oxidation, release agents & any other known contamination.

The correct choice of surface cleaner depends on the surface properties. Essentially non-greasy cleaners are recommended including isopropanol alcohol (mixed 50/50 with clean water) & acetone. Cleaning cloths must be clean, grease & fat free with no loose fibers or cloth particles.

The bond strength is dependent upon the contact pressure of the adhesive to substrate. To assist this process all adhesive tapes require firm hand or roller pressure.

BONDING APPLICATION TEMPERATURE

We recommend that the product, substrate & environment should be between +15°C & 30°C. Ensure that the adhesive product & substrates are allowed time to adjust to the environment temperature before bonding.

For product storage we recommend that products are stored in their original packaging under dry conditions, ideally at room temperature but not warmer than +30°C. High relative humidity & direct sunlight must be avoided at all costs.

For more detailed handling instructions please refer to our comprehensive application guide.

PRODUCT USE

The information in this guide is based upon our knowledge & practical experience. This data is intended only as a source of information given without guarantee & does not constitute a warranty.

Due to the wide variety of possible uses & applications, customers should independently determine the suitability of these products for their specific purpose, prior to use. Trial samples are provided free of charge & without obligation.

For detailed surface preparation & application information please refer to our detailed Surface Condition & Preparation Guide.

tapespec.co.nz **0800 367 8273**

100% NZ owned & operated since 1998 New Zealand Tape Specialists Ltd

tapespec™
● ● ● ●
STICK WITH QUALITY