

**PROFESSIONAL
FLUORESCENT GAFFER**

**PRODUCT
DATA SHEET**

**P-660
PROFESSIONAL FLUORESCENT
GAFFERS CLOTH TAPE**

DESCRIPTION

The P-660 is made from highly visible fluorescent matte finish cloth backing and coated with a premium synthetic rubber adhesive, with excellent holding power.



Made in the USA by SHURTAPE.



ADHESIVE	PREMIUM SYNTHETIC RUBBER
BACKING	MATTE FINISH WOVEN CLOTH
COLOURS (FLUORESCENT)	PINK, ORANGE, YELLOW, GREEN, BLUE

FEATURES



EXCELLENT HOLDING POWER

High initial tack adhesive with excellent holding power.



WATERPROOF

Waterproof matte finish cloth with high tensile strength & conformability.



WRITABLE SURFACE

The surface of the tape can be written on.



HIGH FLUORESCENT VISIBILITY

Available in a variety of Fluorescent colours that fluoresce under black light.



CLEAN REMOVAL

Removes cleanly from most surfaces.



EASY HAND TEAR

Hand tearable for ease of use.

TYPICAL APPLICATIONS

- Professional grade Fluro gaffers tape used in the audio/ visual TV, photography, theatre & movie industry.
- Excellent for bundling wires, taping down cables & cords, & to secure props, mask silk screen frames.
- Designed for multi-purpose use to hold, secure & attach applications in the convention, display, hospitality, exhibition & trade show markets.
- Can be used for book binding, colour coding, labelling & stage marking applications.
- For schools, universities, sporting venues & retail shops.
- Great for temporary floor marking and removes cleanly from most secure surfaces for up to 3 weeks. Not recommended for hardwood floors or in direct sunlight. Great as a highly visible safety & identification cloth tape.

ADVANTAGES

QUICK & EASY TO USE

No clean up mess which occurs with liquid adhesives.

ECONOMICAL


Preparation time is minimal.
Installation is faster & waste is reduced.

SLIT TO SIZE IN NZ

Roll widths are slit to required sizes in New Zealand. Fast delivery to site throughout New Zealand.

FREE TECHNICAL ADVICE

Free technical assistance, samples and advice available throughout NZ from the tape spec sales team.

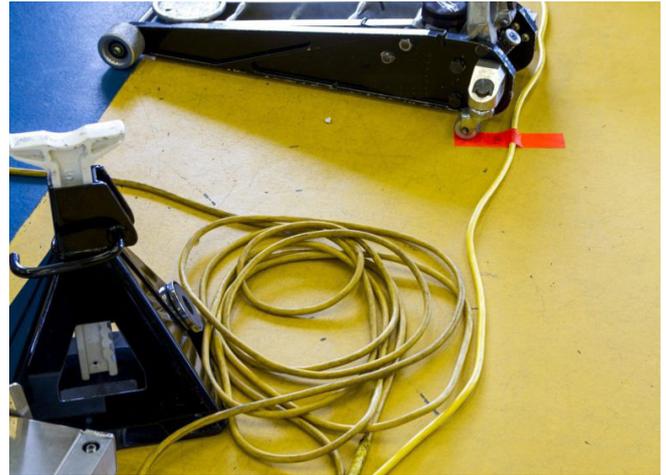


PRODUCT

PROFESSIONAL FLUORESCENT GAFFERS TAPE

Available thickness: **0.27mm**

TAPE STRUCTURE

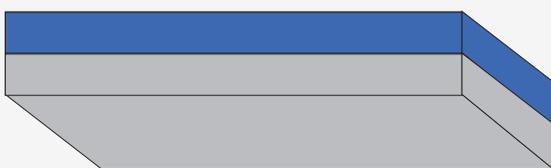

Matte-finish Coated Cloth Backing

Premium Synthetic Rubber

AVAILABLE FLUORESCENT COLOURS



PINK



ORANGE



YELLOW




GREEN



BLUE

Colours fluoresce under black light.

MARKETS

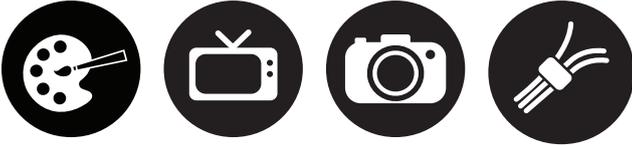

TECHNICAL INFORMATION

Backing	Matte-finish Coated Cloth
Adhesive	Premium Synthetic Rubber
Colours	Pink, orange, blue, yellow, green
Thickness	0.27 mm
Tensile Strength	87.6 N/10 mm
Adhesion to Stainless Steel	8.21 N/10 mm
Elongation	4%
Service Temperature Range	10°C to 82°C
Width Sizes:	24, 36, 48 & 72mm x 25m (76mm Large Core Size) x 10m (38mm Small Core Size) Can be slit to various width sizes.
Length Sizes:	25m (76mm Core Size) 10m (38mm Core Size)
Storage and Usage Conditions	Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment.
Origin	Made in the USA by SHURTAPE ISO 9001 Certified Quality System

Slit to various width sizes as required.

NOTE: We recommend tape product testing to assess the suitability of the selected product to the end application & conditions. For surface preparation and guidelines please refer to our website www.tapespec.co.nz Advanced Tape Application Guide.

SURFACE SUBSTRATE CONDITION & PREPARATION

The surfaces to be bonded must be dry & free from any contamination including dust, oils, & fats, oxidation, release agents & any other known contamination.

The correct choice of surface cleaner depends on the surface properties. Essentially non-greasy cleaners are recommended including isopropanol alcohol (mixed 50/50 with clean water). Cleaning cloths must be clean, grease & fat free with no loose fibers or cloth particles.

The bond strength is dependent upon the contact pressure of the adhesive to substrate. To assist this process all adhesive tapes require firm hand or roller pressure.

BONDING APPLICATION TEMPERATURE

We recommend that the product, substrate & environment should be between +15°C & 25°C. Ensure that the adhesive product & substrates are allowed time to adjust to the environment temperature before bonding.

For product storage we recommend that products are stored in their original packaging under dry conditions, ideally at room temperature but not warmer than +25°C. High relative humidity & direct sunlight must be avoided at all costs.

For more detailed handling instructions please refer to our comprehensive application guide.

PRODUCT USE

The information in this guide is based upon our knowledge & practical experience. This data is intended only as a source of information given without guarantee & does not constitute a warranty.

Due to the wide variety of possible uses & applications, customers should independently determine the suitability of these products for their specific purpose, prior to use. Trial samples are provided free of charge & without obligation.

For detailed surface preparation & application information please refer to our detailed Surface Condition & Preparation Guide.



Tapespec - Distributed by Acme

www.acme.co.nz PH: 0800 226 369



NEW ZEALAND TAPE SPECIALISTS

www.tapespec.co.nz