


CLOTH TAPE RANGE

High Performance Tapes



TAPE STRUCTURE

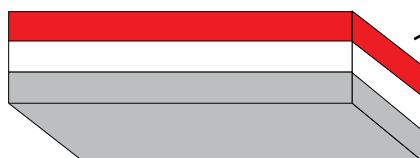

Polyethylene Plastic Coating – either in gloss or matt formulations (Providing moisture & abrasion resistance).

Rayon fabric cloth backing - longitudinal & cross weave mesh construction (Extra strength).








Natural Rubber Resin Adhesive – cross linked for superior holding power & overall performance.

MAJOR CLOTH TAPE BENEFITS

- Premium cloth backing construction – extra strength in the weave construction.
- Natural Rubber adhesive technology using high performance cross linked adhesives.
- Excellent conformability, moisture resistance, high tensile strength & easy hand tear.



Cloth Tape Range


PRODUCT	CODE	ADHESIVE	BENEFITS	APPLICATIONS	COLOUR
PREMIUM Polyethylene coated Cloth tape Thickness: 0.31 mm	0116 - BULK	EXTRA STRENGTH Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides excellent bonding & holding power• Extra strength 80 mesh Cloth scrim construction• Hand tearable & easy off the roll	<ul style="list-style-type: none">• For heavy duty holding, sealing, bundling, colour coding, packaging, protection & reinforcing• Excellent holding power & removability for lighting & stage applications - Gaffer tape applications.• Used in construction / building, bookbinding, exhibitions, motor sports & for instant repairs.	
MULTI-PURPOSE Polyethylene coated Cloth tape Thickness: 0.26 mm	0118 - BULK PCR - RETAIL	HIGH STRENGTH Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides improved bonding & holding power• High strength 55 mesh Cloth scrim construction• Hand tearable & easy off the roll	<ul style="list-style-type: none">• For multi-purpose holding, sealing, bundling, colour coding, packaging, protection & reinforcing• Very good holding power & removability for lighting & stage applications.• Used in construction / building, bookbinding, exhibitions, motor sports & for instant repairs.	
GENERAL PURPOSE Polyethylene coated Cloth tape Thickness: 0.25 mm	0119 - BULK UCR - RETAIL	STRONG Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides improved bonding & holding power• Strong 45 mesh Cloth scrim construction• Hand tearable & easy off the roll	<ul style="list-style-type: none">• For general purpose holding, sealing, bundling, colour coding, packaging, protection & reinforcing• Used in construction / building, bookbinding, exhibitions, instant repairing & motor sports.• Very good for sealing drums & canisters, also for joint seals in HVAC duct work.	
PROFESSIONAL MATT FINISH Polyethylene coated Cloth tape Thickness: 0.33 mm	0160 - BULK PMR - RETAIL	EXTRA STRENGTH Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides excellent holding power & clean removability• Extra strength 80 mesh Cloth scrim construction - Matt non reflective surface finish.• Hand tearable & easy off the roll	<ul style="list-style-type: none">• Excellent holding power & removability for lighting & stage applications - Non reflective surface finish for Gaffer tape applications.• Used in exhibitions, TV & stage productions, sporting events & for book binding.	
PREMIUM HAZARD Polyethylene coated Cloth tape Thickness: 0.26 mm	0011 - BULK 0011R - RETAIL	EXTRA STRENGTH Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides excellent bonding & holding power• Extra strength 80 mesh Cloth scrim construction• Highly visible Yellow / Black diagonal Hazard warning stripes.• Hand tearable & easy off the roll	<ul style="list-style-type: none">• Heavy duty Hazard warning cloth tape for factories, warehouses, building sites, schools, sports areas, exhibitions, public spaces etc.• Used to clearly identify & mark out hazard areas for interior use & suitable for short term exterior applications.	
PROFESSIONAL FLURO FINISH Polyethylene coated Cloth tape Thickness: 0.30 mm	0162 - BULK	GOOD STRENGTH Cross linked Natural Rubber	<ul style="list-style-type: none">• Cross linked Rubber Adhesive provides excellent holding power & clean removability• Extra strength 80 mesh Cloth scrim construction - Fluroescent Matt surface finish.• Hand tearable & easy off the roll	<ul style="list-style-type: none">• Excellent holding power & removability for lighting & stage positioning applications - Stand out Fluro colours, also can be written on.• Used in exhibitions, TV, audio & stage productions, sporting events & for book binding.• Excellent for visual colour coding, defining security & construction areas such as rigging & scaffolding.	
Heavy Duty Polyethylene coated Cloth tape Thickness: 0.36 mm	3349 - BULK	HIGH ADHESION Cross linked Natural Rubber	<ul style="list-style-type: none">• Extra thick cross linked rubber adhesive provides excellent bonding and holding power.• Extra strength 80 mesh cloth scrim construction.• Hand tearable and easy off the roll - 45 meter length rolls	<ul style="list-style-type: none">• For extra heavy duty holding, sealing, bundling, colour coding, packaging, protection and reinforcing.• Excellent adhesion to rough, textured and irregular surfaces.• Used in construction / building, bond breaking applications, marine and fabrication, motorsports and for instant repairs.	



TAPE SLITTING & PACKAGING

This is carried out in New Zealand at our state of the art conversion plant in Auckland.

- All Cloth Tapes can be slit to various width sizes as required – standard roll widths are: 18, 24, 36, 48, 72 & 96 mm
- Cloth Tape roll lengths come in standard: 5, 25 & 30 meters (exceptions can be looked at based on volume requirements.)
- All cloth tape rolls are plastic wrapped to protect from damage & dust prior to use.
- Retail / DIY packaging is available for all cloth tape products as required.

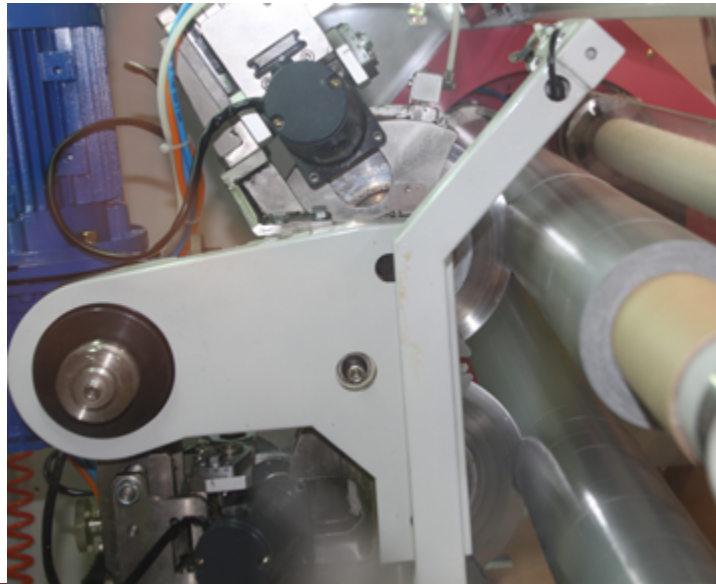

RECOMMENDED - IMPORTANT:

- **Product testing** is always recommended to ensure the selected product is suitable for the intended application. This testing should be carried prior to the final application, please select an inconspicuous place to assess product suitability.
- The **tapespec sales team** is always available to assist with application guidance and can visit on site to help in the process of product selection and application.
- Please refer to the **tapespec website** for detailed surface preparation & application guides. We can also supply an e-mail or physical copy of these guides to ensure all correct procedures are followed.



tapespec.co.nz 0800 367 8273

100% NZ owned & operated since 1998

New Zealand Tape Specialists Ltd

tapespecTM
● ● ● ●
STICK WITH QUALITY