




PVC FOAM TAPE RANGE

Sealing Tapes

Single Sided PVC Foam Tape

The single sided PVC foam tapes are made from a closed cell conformable foam structure and are coated one side with a long life, high bond acrylic adhesive system. Excellent for long life sealing against air, moisture, light and dust penetration.

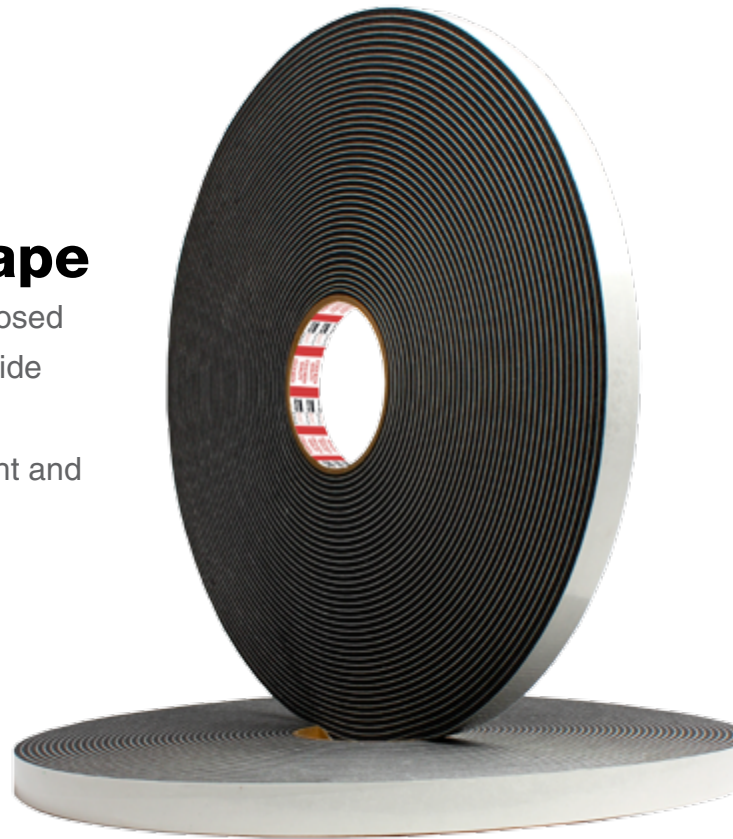

Key Features

- The closed cell foam structure completely seals out air, moisture, vapour, light & dust when compressed at least 30%.
- Formulated from durable Polyvinyl Chloride (PVC) for a long term performance life.
- Cushions & dampens against shock & vibration.
- Insulates against temperature, sound & movement.
- Resists most chemicals & UV – weather conditions.
- Coated one side with a long-life, high bond acrylic adhesive.
- Can be die cut to suit various closure shapes & designs.

Advantages

QUICK & EASY TO USE

No clean up mess which occurs with liquid adhesives.
No special tools required.

ECONOMICAL

Preparation time is minimal.
Installation is faster & waste is reduced.

SLIT TO WIDTH SIZE IN NZ

Roll widths are slit to required sizes in New Zealand.
Fast delivery to site throughout New Zealand

FREE TECHNICAL ADVICE

Free technical assistance, samples and advice available throughout NZ from the tape spec sales team.

Important Markets

BUILDING & CONSTRUCTION

Example: Used as water seal between curtain walls & wall panels. Excellent for anti-vibration & as a noise seal in flooring & wall construction.

HVAC


Example: Used as a positive seal in heating & air conditioning duct work.

TRANSPORTATION

Example: Used in the bodywork to seal & reduce vibration & noise in cars, trucks, trailer, bus, boat & campervan construction. Often die cut into gasket shapes to fit closure designs.

INDUSTRIAL & MANUFACTURING

Examples: Used as a permanent cabinet assembly seal, display cabinets, machinery enclosures. Electronic equipment & appliance assembly.

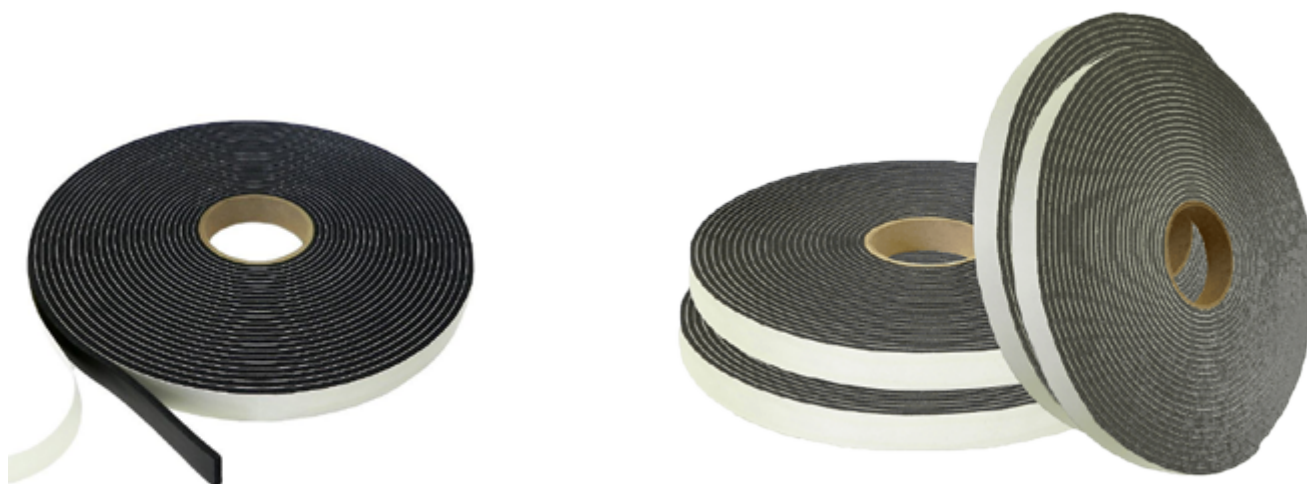

Products

CODE	COLOURS	THICKNESS MM	DESCRIPTION
Foam 1	●	1.6, 3.2, 4.8, 6.4, 9.5, 12, 16, 13.2, 19	Light Density Foam tape designed to easily compress & conform, with properties of strength & resilience. Meets FMVSS 302A - Self Extinguishing Formulation
Foam 2	●	1.6, 3.2, 4.8, 6.4, 9.5, 12	Medium Density Foam tape with an excellent combination of flexibility & conformability, with properties of strength & wear resistance.
Foam 3	●	1.6, 3.2, 4.8, 6.4	Medium - Firm Density for tough duty applications, with extra strength & wear resistance.

All Foam products can be slit to required sizes

Surface Preparation & Application Guides: please see at www.tapespec.co.nz
We recommend surface & application testing to ensure product suitability.

tapespec.co.nz 0800 367 8273

100% NZ owned & operated since 1998

New Zealand Tape Specialists Ltd

tapespec™
● ● ● ●
STICK WITH QUALITY