


TAPESPEC WASHI RANGE

The Professionals Choice

ADHESION GUIDE

NOTE:

(Surface testing recommended prior to application.)

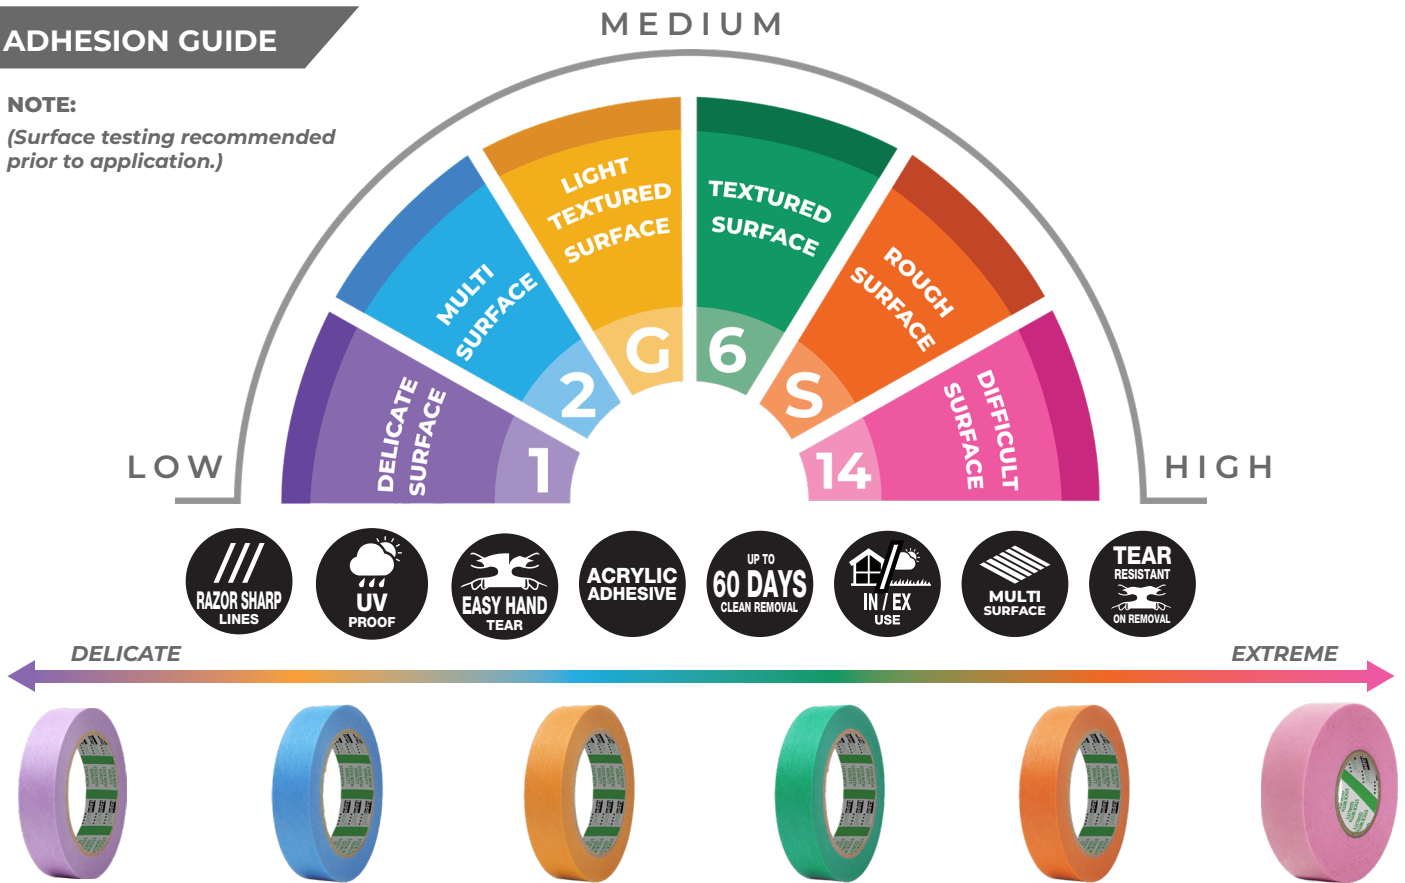

1	2	G	6	S	14
Delicate Surface	Multi Surface	Light Textured Surface	Textured Surface	Rough Surface	Difficult Surface
ADHESION: LOW - MEDIUM	ADHESION: LOW - MEDIUM	ADHESION: MEDIUM	ADHESION: MEDIUM - HIGH	ADHESION: HIGH	ADHESION: EXTRA HIGH
<p>USED ON:</p> <ul style="list-style-type: none"> Freshly painted surfaces (at least 24 hours old) Vinyl coated wallpaper Primed wallboard Ceilings Cabinets Glass Excellent for various straight line striping, pattern, design applications. Excellent for delicate curved profiles & irregular shapes / surfaces. 	<p>USED ON:</p> <ul style="list-style-type: none"> Delicate multi surfaces Cured painted surfaces Ceilings Skirting boards Sealed woodwork & trim Glass & Metal surfaces Sealants & silicone masking 	<p>USED ON:</p> <ul style="list-style-type: none"> Lightly textured woodwork, framework Ceilings Glass & Metal surfaces Plastic 	<p>USED ON:</p> <ul style="list-style-type: none"> Excellent conformability for textured & rough surfaces Textured walls & woods Carpets Concrete, stucco & stone work Plastics Glass & Metal surfaces Sealants & silicone masking 	<p>USED ON:</p> <ul style="list-style-type: none"> Slightly damp textured & uneven surfaces Excellent on Cedar Timber Non-flaky woodwork Most metal, glass & plastic surfaces Carpets Polished concrete, tiles & composite panels Sealants & silicone masking 	<p>USED ON:</p> <ul style="list-style-type: none"> Elastomeric paint & waterproof membrane paint systems Sandblasting & marine masking applications Concrete, stuccoes, tiles, composite panels & onto plastics Aluminium & Metals Excellent for securing heavy duty plastic masking films Up to 30 days exterior - clean removal