

CAMOUFLAGE CLOTH TAPE

PRODUCT DATA SHEET

0163 PREMIUM CAMOUFLAGE CLOTH DUCT TAPE

DESCRIPTION

Premium grade Cloth Duct Tape, printed with a distinctive camouflage pattern for disguising / hiding in the presence of a (person, animal, or object). Coated one side with an aggressive high adhesion Rubber Adhesive System.



ADHESIVE	NATURAL RUBBER
BACKING	HIGH STRENGTH CLOTH
COLOUR	CAMOUFLAGE

FEATURES



CAMOUFLAGE PATTERN

Printed with a distinctive camouflage pattern for disguising / hiding in the presence of a (person, animal, or object).



RUBBER ADHESIVE

Coated one side with an aggressive high adhesion Rubber Adhesive System. Offers extra holding power & long life properties.



EXCELLENT CONFORMABILITY

Good tensile strength with excellent conformability to irregular surfaces.



WEATHER RESISTANCE

Excellent resistance to moisture & weather conditions (once applied correctly).



HAND TEARABLE

Easy hand tearable for ease of use.

TYPICAL APPLICATIONS

- General bundling, sealing, joining & waterproofing repair cloth tape.
- Used by the Military as a heavy duty Cloth Duct Tape to disguise, secure - hold & join.
- Used as a Hunting Camo Wrap Tape onto various hunting / fishing equipment.
- Markets: Armed Forces, Hunting & Fishing, Duck Shooting, Film & Entertainment and Recreational Activities - Paintball etc.

ADVANTAGES

QUICK & EASY TO USE

No clean up mess which occurs with liquid adhesives.

ECONOMICAL

Preparation time is minimal.
Installation is faster & waste is reduced.

SLIT TO SIZE IN NZ


Roll widths are slit to required sizes in New Zealand. Fast delivery to site throughout New Zealand.

FREE TECHNICAL ADVICE

Free technical assistance, samples and advice available throughout NZ from the tape spec sales team.



CAMOUFLAGE TAPE STRUCTURE

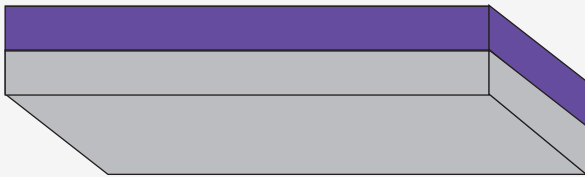

High Strength Cloth

Natural Rubber Adhesive

PRODUCT

PREMIUM CAMOUFLAGE CLOTH DUCT TAPE

Available thickness: **0.30MM**

TECHNICAL INFORMATION

Backing	High Strength Cloth
Adhesive	Natural Rubber (Solvent Free)
Colour	Camouflage
Thickness	0.30 mm
Peel Adhesion	1100 (gf / 25 mm)
Ball Tack	28
Elongation	11.5%
Tensile Strength	16 (kgf / 25mm)
Standard Roll Width	24 / 36 / 48 mm
Standard Roll Length	10 / 25 m

Available to slit to any width size from 1250mm log roll.

SURFACE SUBSTRATE CONDITION & PREPARATION

The surfaces to be bonded must be dry & free from any contamination including dust, oils, & fats, oxidation, release agents & any other known contamination.

The correct choice of surface cleaner depends on the surface properties. Essentially non-greasy cleaners are recommended including isopropanol alcohol (mixed 50/50 with clean water) & acetone. Cleaning cloths must be clean, grease & fat free with no loose fibers or cloth particles.

The bond strength is dependent upon the contact pressure of the adhesive to substrate. To assist this process all adhesive tapes require firm hand or roller pressure.

BONDING APPLICATION TEMPERATURE

We recommend that the product, substrate & environment should be between +15°C & 30°C. Ensure that the adhesive product & substrates are allowed time to adjust to the environment temperature before bonding.

For product storage we recommend that products are stored in their original packaging under dry conditions, ideally at room temperature but not warmer than +30°C. High relative humidity & direct sunlight must be avoided at all costs.

For more detailed handling instructions please refer to our comprehensive application guide.

PRODUCT USE

The information in this guide is based upon our knowledge & practical experience. This data is intended only as a source of information given without guarantee & does not constitute a warranty.

Due to the wide variety of possible uses & applications, customers should independently determine the suitability of these products for their specific purpose, prior to use. Trial samples are provided free of charge & without obligation.

For detailed surface preparation & application information please refer to our detailed Surface Condition & Preparation Guide.

NOTE: We recommend tape product testing to assess the suitability of the selected product to the end application & conditions. For surface preparation and guidelines please refer to our website www.tapespec.co.nz Advanced Tape Application Guide.



Tapespec - Distributed by Acme

www.acme.co.nz PH: 0800 226 369



NEW ZEALAND TAPE SPECIALISTS

www.tapespec.co.nz